


COMPONENTS FOR THE HIGHEST REQUIREMENTS IN HYGIENIC AND CLEANING

FULL ACCESS SYSTEM (FXS)

- _ Available for the rotary valve types ZXD, ZRD, ZVD, and ZKD sizes 150 to 300/320
- _ FXS single-sided: Rotor single-sided with quick coupling and extraction device
- _ FXS double-sided: additional swing-open side cover plate
- _ Detachable rotor (at .3 execution)
- _ With fixed tool on the rotary valve (option)
- _ For CIP applications the bore of the housing can be closed with a separate side cover (accessory)

ZRD HYGIENIC WITH FULL ACCESS SYSTEM (FXS), DOUBLE SIDED (Option)

Shown ZRD in .3 execution

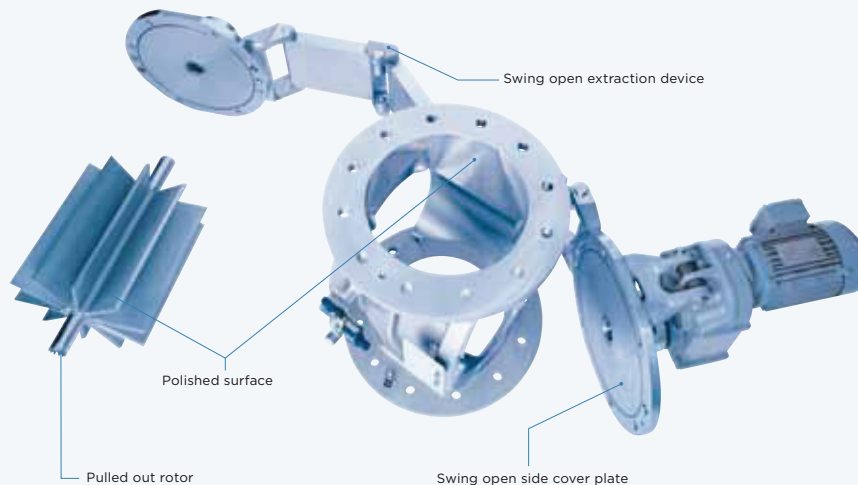

HYGIENIC EXECUTION

Designed for hygienic applications with polished surfaces and easy cleaning option

VALVES TYPES	ZRD size: 150-400, ZXD size: 150-350
MATERIAL	Stainless steel 1.4308 (304)/1.4404 (316L)
MAX. OPERATING PRESSURE	1.5 bar (15 psi)
SURFACES	Product contact surfaces polished stainless steel Ra=0.8 µm
ROTOR	With round pockets, polished, without stiffening plates, chamfered blades
OUTBOARD BEARING	Separated from product by purged seal arrangement and product drop out opening
SHAFT SEAL	FDA-conforming

